

# Standard specifications

## BT200LFE02001

March 05, 2015

KAWASAKI HEAVY INDUSTRIES, LTD.

ROBOT DIVISION

Specification :	90101-2313DEA
(Arm) :	90151-0035DEA
(Controller) :	90152-0005DEA


# 1. Specification of Robot

## [1] Robot Arm





1. Model	BT200L-B		
2. Type	Articulated robot		
3. Degree of freedom	6 axes (Option 7 axes)		
4. Axis specification	Operating axis	Max. operating range	Max. speed
	Arm rotation (JT1)	+160 ° ~ -160 °	105 ° /s
	Arm out-in (JT2)	+80 ° ~ -130 °	85 ° /s
	Arm up-down (JT3)	+90 ° ~ -75 °	100 ° /s
	Wrist swivel (JT4)	+210 ° ~ -210 °	120 ° /s
	Wrist bend (JT5)	+125 ° ~ -125 °	120 ° /s
	Wrist twist (JT6)	+210 ° ~ -210 °	200 ° /s
5. Repeatability	±0.2 mm (at the tool mounting surface)		
6. Max. payload	200 kg		
7. Max. linear interpolation speed	5000 mm/s		
8. Load capacity of wrist			
		Max. torque	Moment of inertia *
	JT4	1334 N·m	199.8 kg·m <sup>2</sup>
	JT5	1334 N·m	199.8 kg·m <sup>2</sup>
	JT6	588 N·m	154.9 kg·m <sup>2</sup>
Note * Each value in this table shows allowable moment of inertia of JT4/JT5/JT6 when max. allowed torque is applied to each axis. If more detailed data is required for your application, please contact Kawasaki.			
9. Driving motor	Brushless AC Servomotor		
10. Working range	See attached drawing		
11. Mass	1100 kg (without options)		
12. Color	Munsell 10GY9/1 equivalent		
13. Installation	Shelf mounting		
14. Environment cond.	(Temperature) 0 ~ 45 ° C, (Humidity) 35 ~ 85 %, no dew, nor frost allowed		
15. Dressing	Cable length between flange and tool is 1.5m. Consult Kawasaki when non-standard dressing will be applied.		
16. Options	Adjustable mechanical stoppers JT1/JT2/JT3		
	Adapter bracket for tool		
17. Others	Consult Kawasaki about maintenance parts and spare parts.		

[2] Controller		
1. Model	E02	
2. Enclosure	Enclosed structure / Indirect cooling system	
3. Dimensions	See attached drawing	
4. Number of controlled axes	Max.9 axes (standard 7 axes, option 2 axes)	
5. Servo control and drive system	Full Digital Servo System	
6. Type of control	Teach mode	Joint, Base, Tool, Fixed Tool (option) operation mode
	Repeat mode	Joint, Linear, Circular (option) interpolation
7. Teaching method	Teaching or AS language programming	
8. Memory capacity	8 MB	
9. External operation signals	External Emergency stop, External Hold, etc.	
10. Number of IO slots	3 slots	
11. Operation panel	Teach/Repeat SW, Emergency Stop SW, Control power lamp	
12. Communication I/F	Ethernet(100BASE-TX) , USB, RS-232C each 2port (1port on panel, 1port inside controller)	
13. Mass	See attached drawing	
14. Power requirement	AC200 V - AC220 V $\pm$ 10%, 50/60 Hz, 3 phases, Max. 7.5 kVA	
15. Ground	Less than 100 $\Omega$ (robot dedicated ground) Leakage current: max. 100 mA	
16. Ambient temperature	0 - 45°C	
17. Relative humidity	35 - 85 % (non-condensation)	
18. Color	Munsell: 10GY9/1 equivalent	
19. Teach Pendant	TFT color display (5.7 inch LCD) with touch panel Emergency Stop SW, Teach Lock SW and Enable SW	
20. Safety Circuit	Category: 4, Performance Level: e (EN ISO13849-1) ★	
21. Standard Options		
	General purpose IO board	IN:32 OUT:32 NPN(sink) type or PNP(source) type
	TP sheet language	English or Japanese or Chinese
	I/O connector	D-SUB 37pin(male, female) with cover
	Power/Signal cable	5m, 10m, 15m
	Teach Pendant cable	5m, 10m, 15m
	Transformer unit	AC380V-415V / AC440V-480V by tap selection
22. Other Options		
	Additional IO board	IN:64/96 OUT:64/96 NPN(sink) type or PNP(source) type
	Motor brake release	Manual brake release switch BOX
	PC cable (RS-232C)	1.5 m, 3 m
	External axes control	Additional amplifier and harnesses for external axes
	Extended safety functions	Cubic-S(Motion area monitoring, Joint monitoring, Speed monitoring etc.)
	Teach Pendant option	Connector for TP less
	Fast check mode	Fast check mode Switch
	Others	Field BUS, Software PLC, Analog input/output, Conveyor Synchronization
23. Others	Consult Kawasaki about maintenance parts and spare parts.	


★ Category and Performance level (PL) are determined by the whole system and conditions.  
The safety circuit of this controller is available in the system of category: up to 4, PL: up to e.

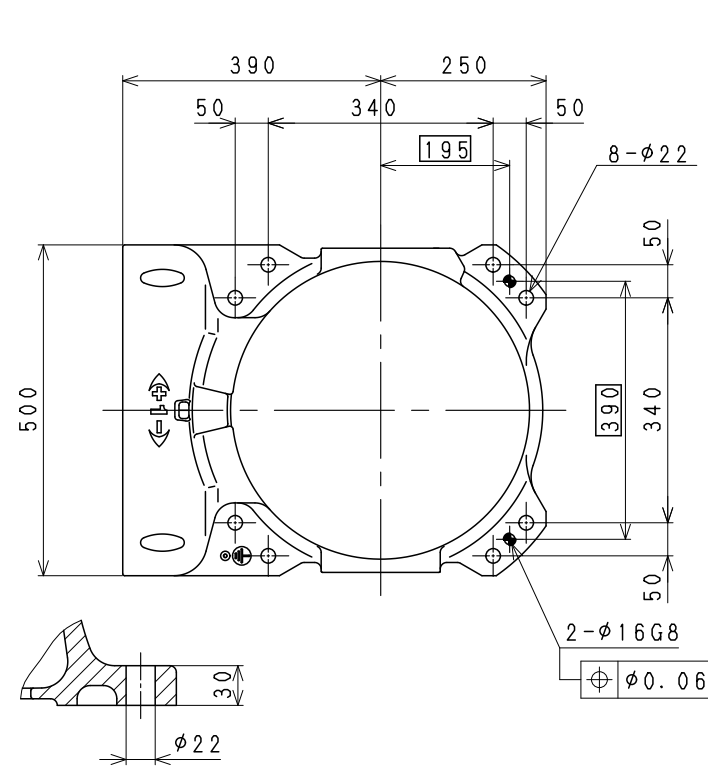

Installation Dimensions

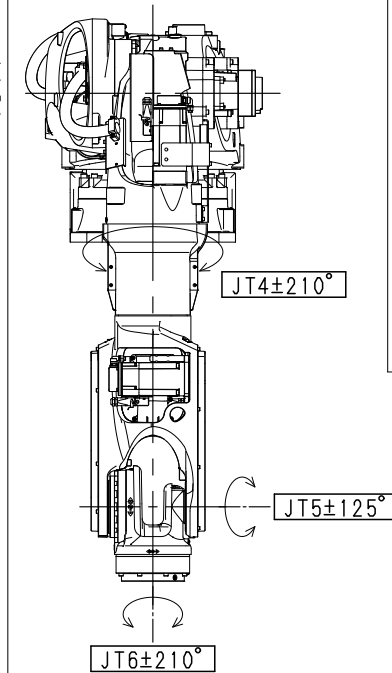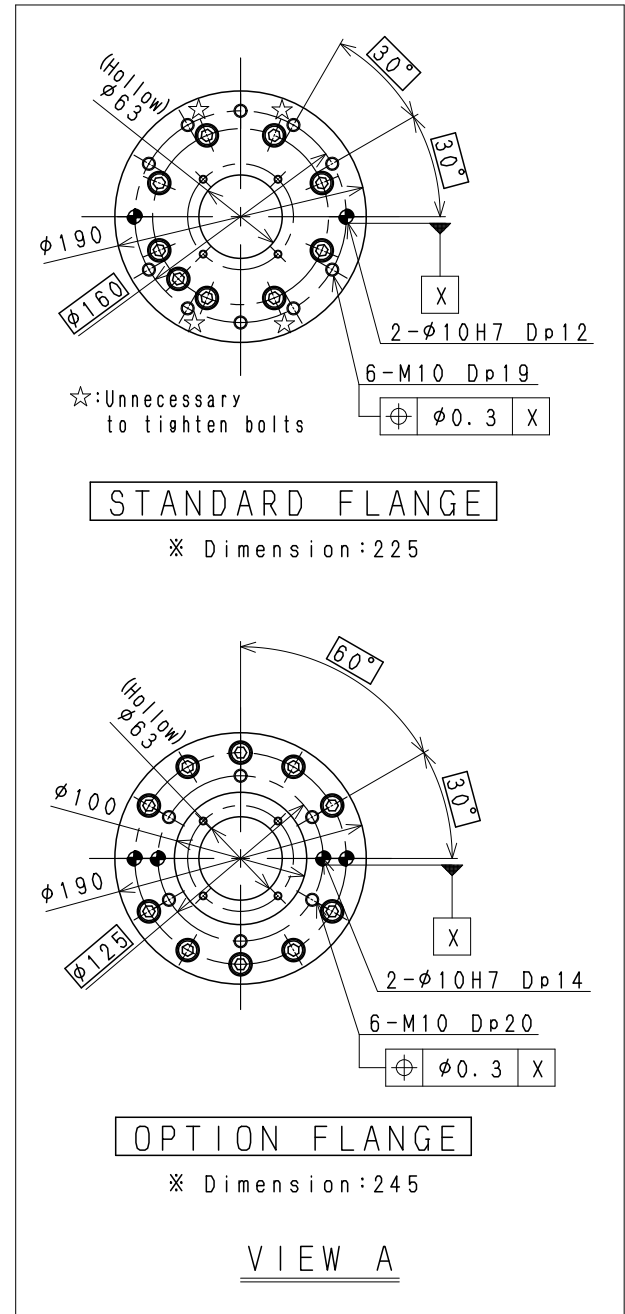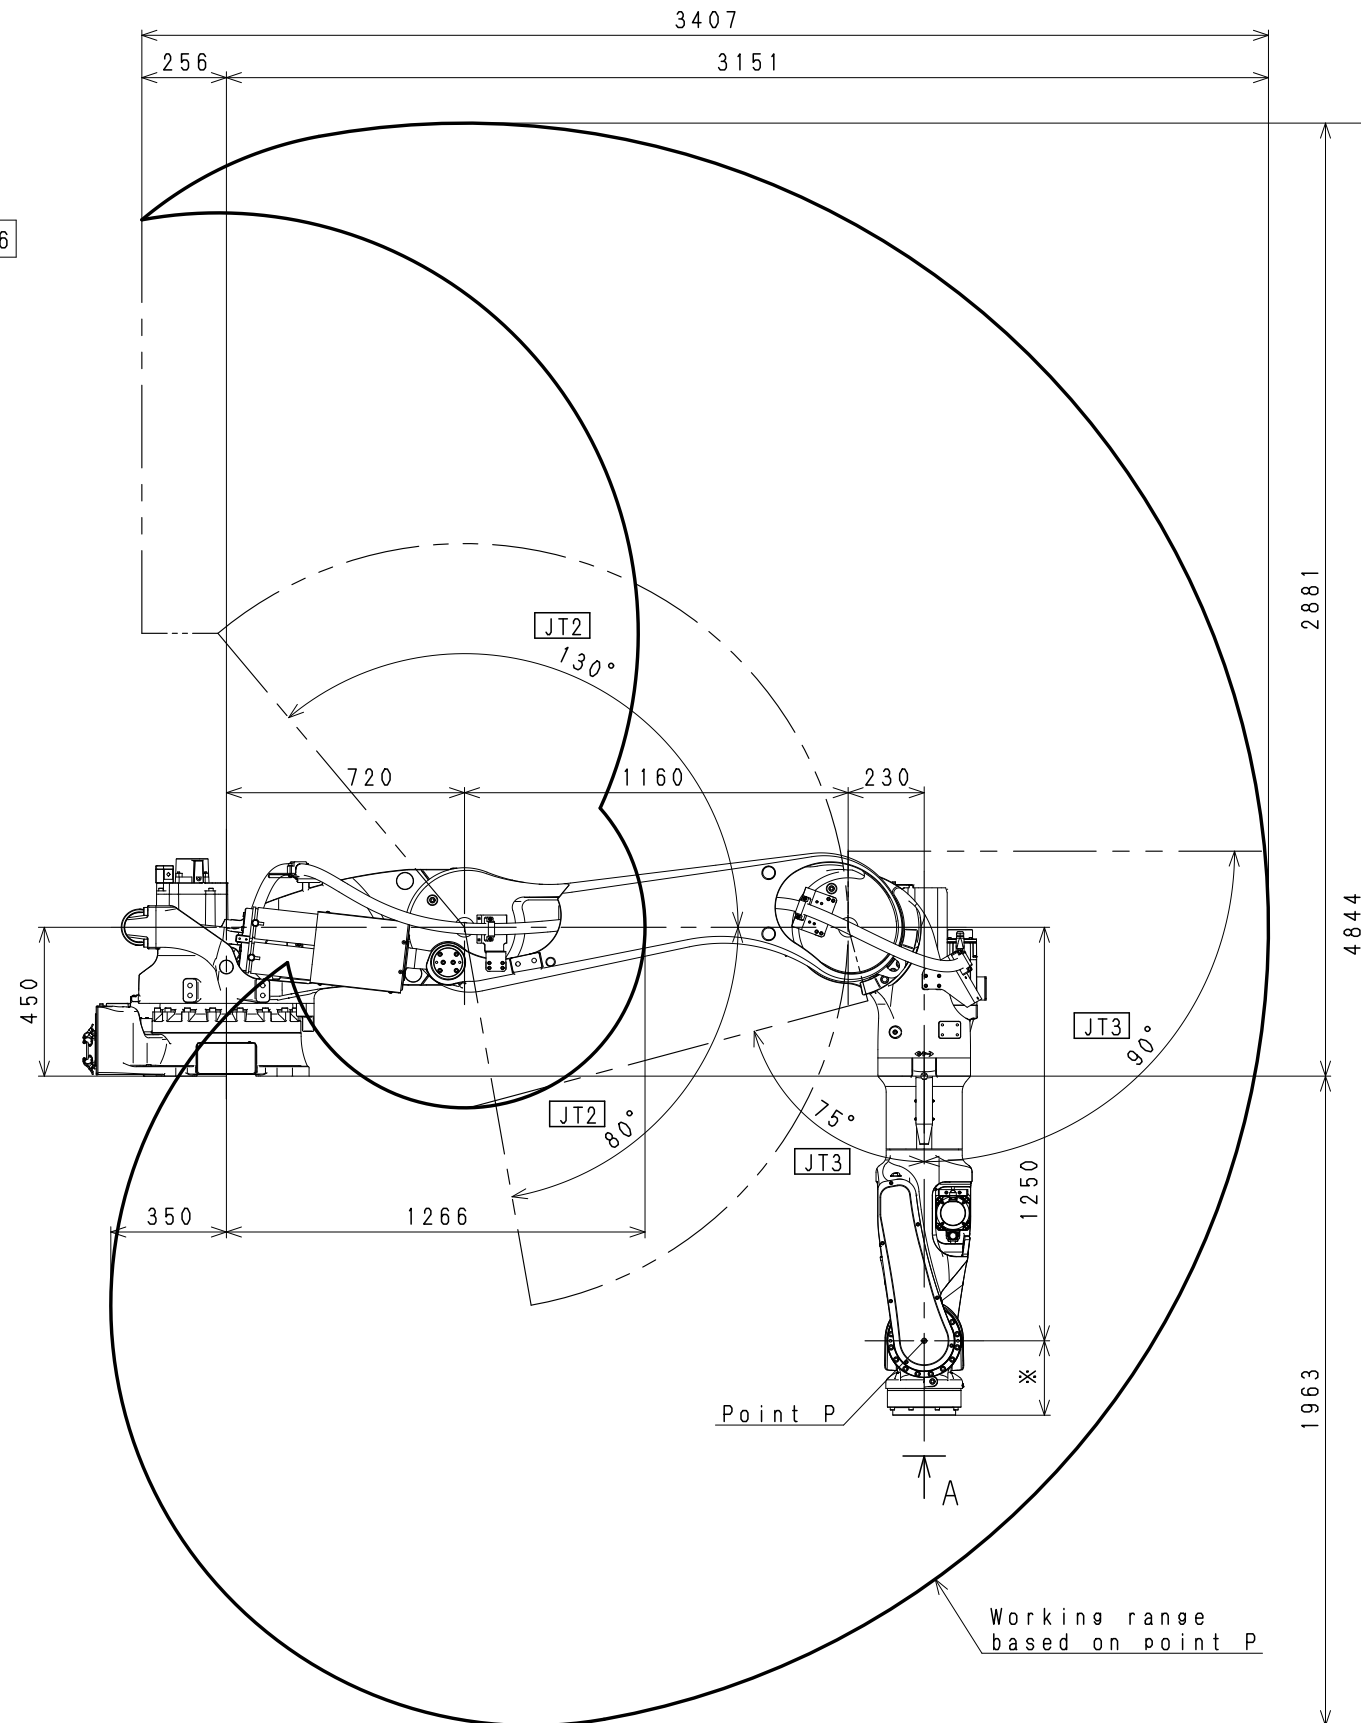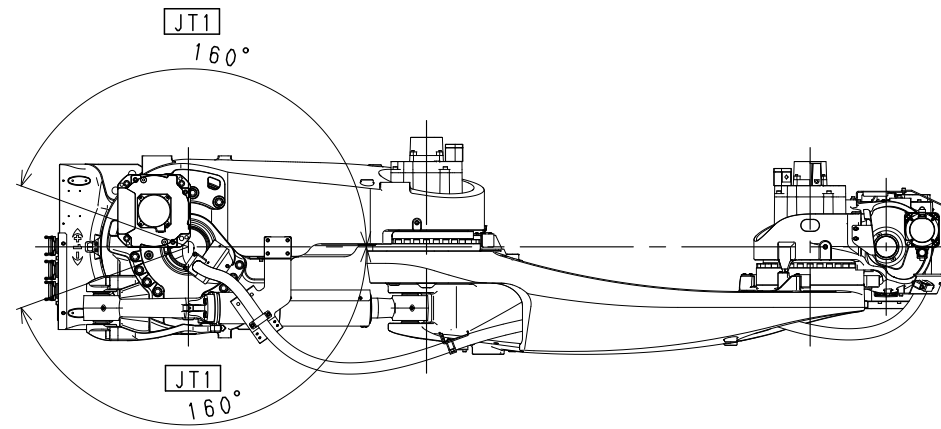

BT165L/200L  
 WORKING RANGE

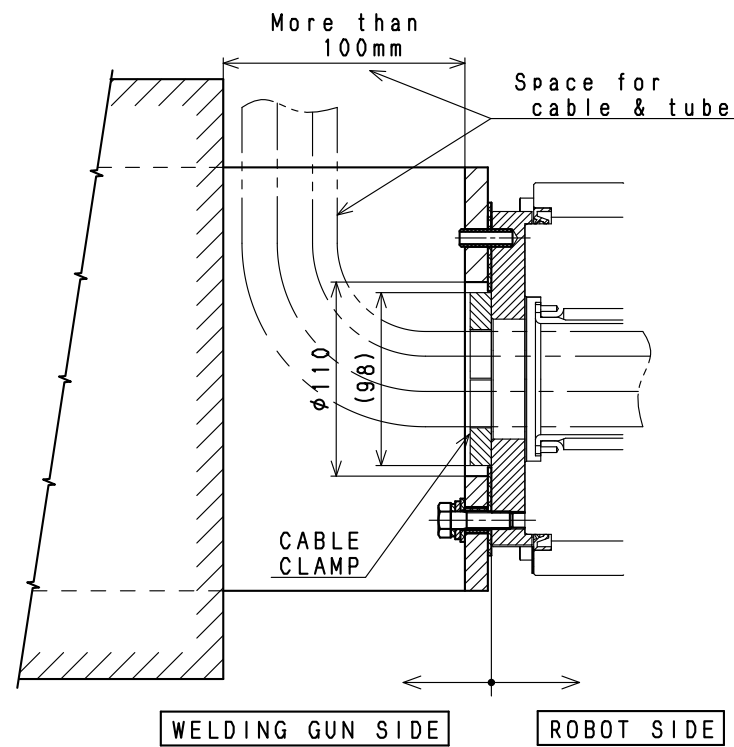


SECTION: A-A

NULL POSITION OF THE ROBOT

ロボット標準姿勢

CABLE & TUBE  
←

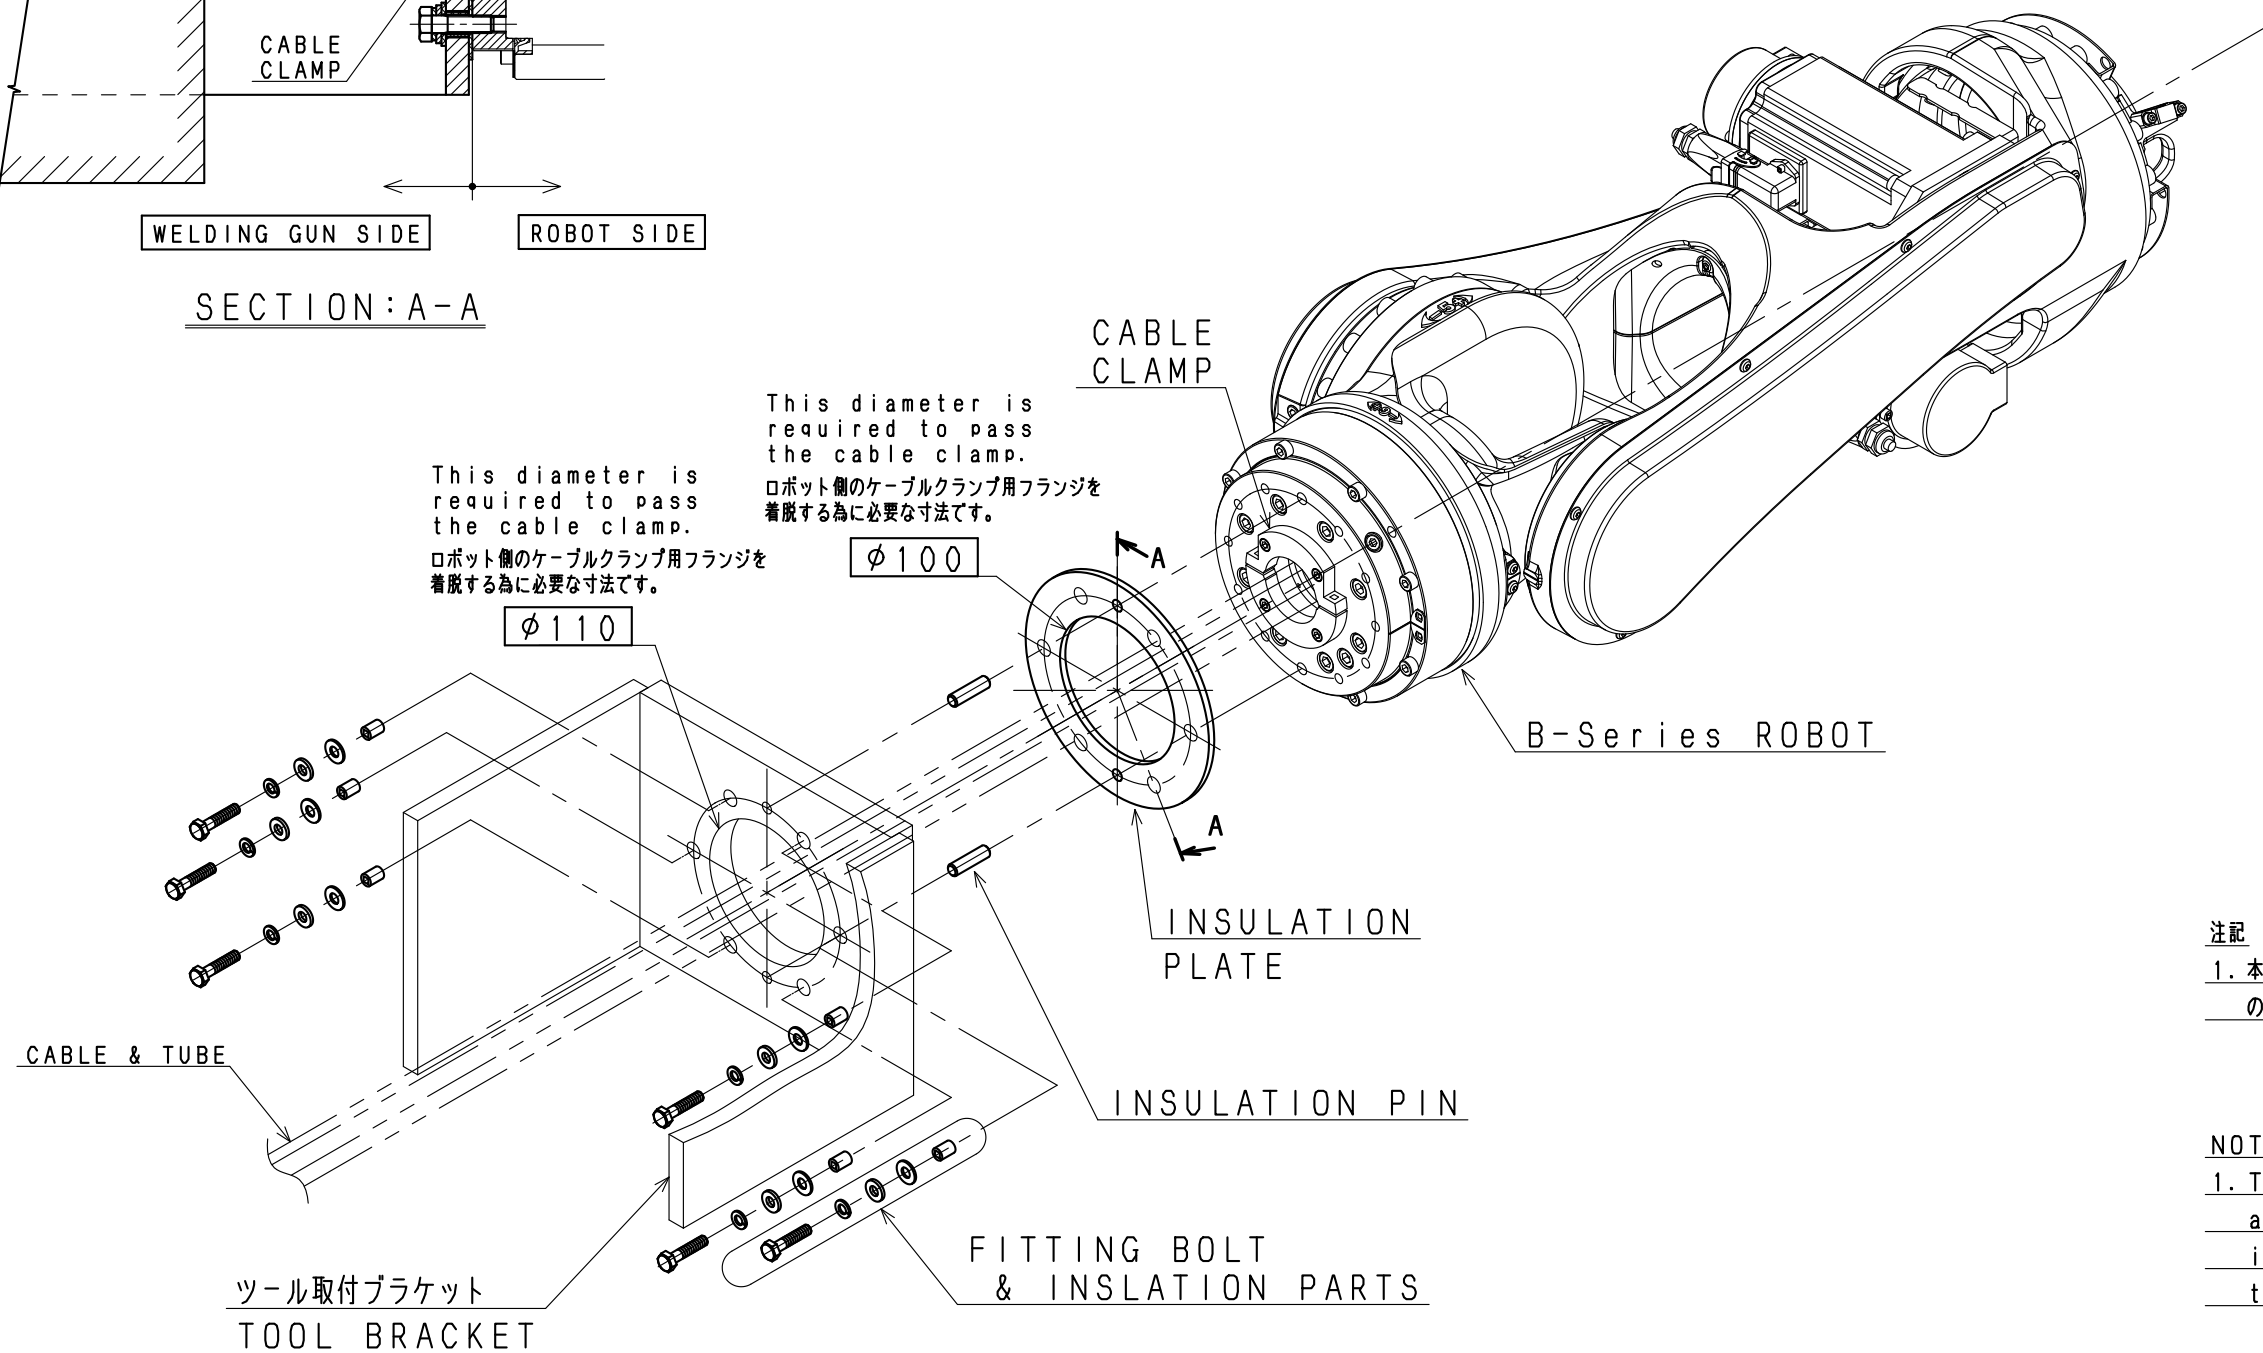

注記

1. 本図は、一例としてロボット手首へのツールの取付要領を示します。


NOTES

1. This figure shows as an example how to install a tool to the robot wrist.


B-Series ROBOT  
TOOL INSTALLATION PROCEDURE  
(ツール取付要領図)

E 0 2   C O N T R O L L E R


M A S S : 4 0 K g

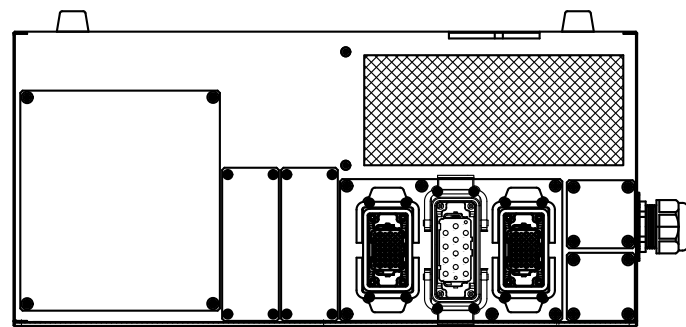


R E A R   V I E W

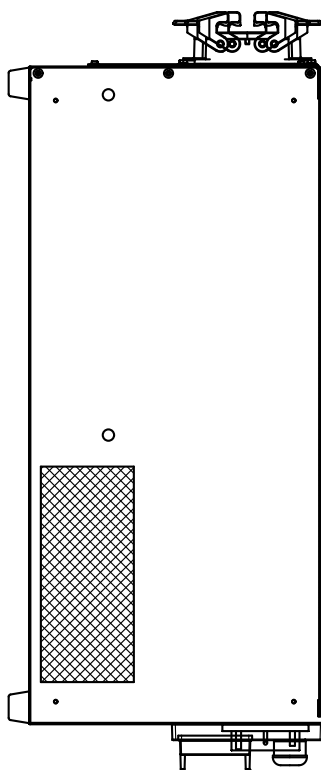


S I D E   V I E W

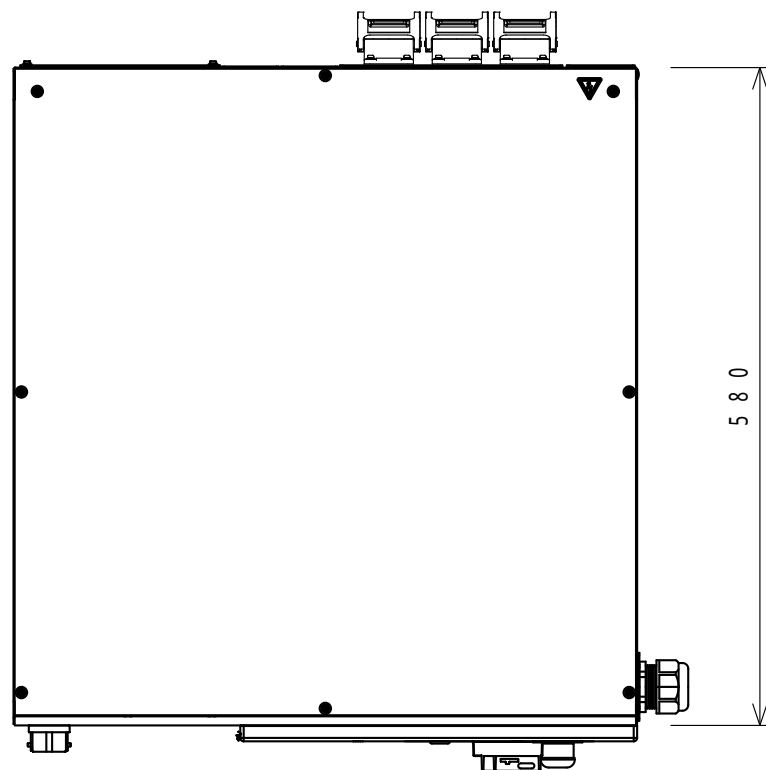

T O P   V I E W


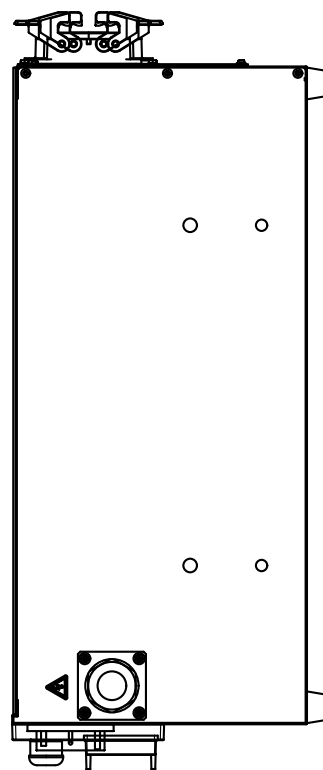


S I D E   V I E W

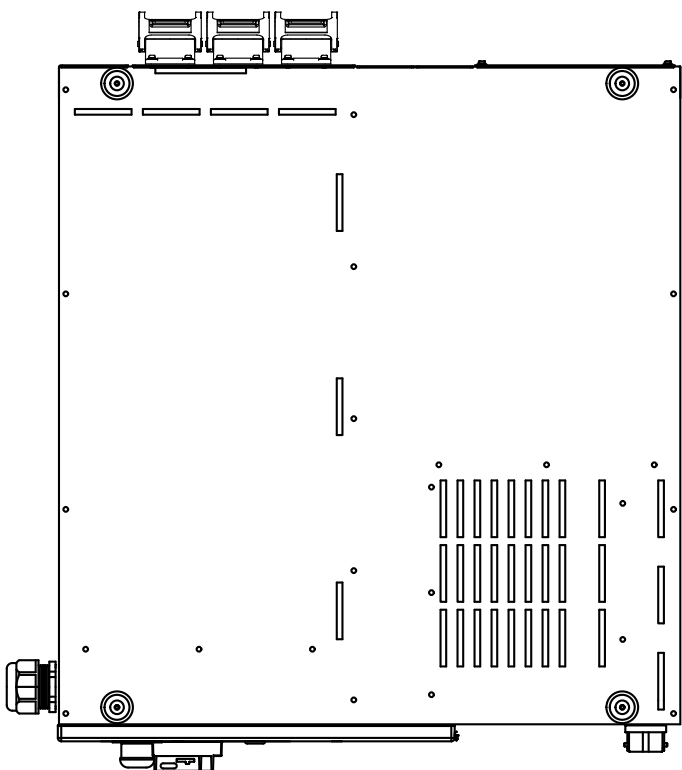

B O T T O M   V I E W

V e r t i c a l   M o u n t

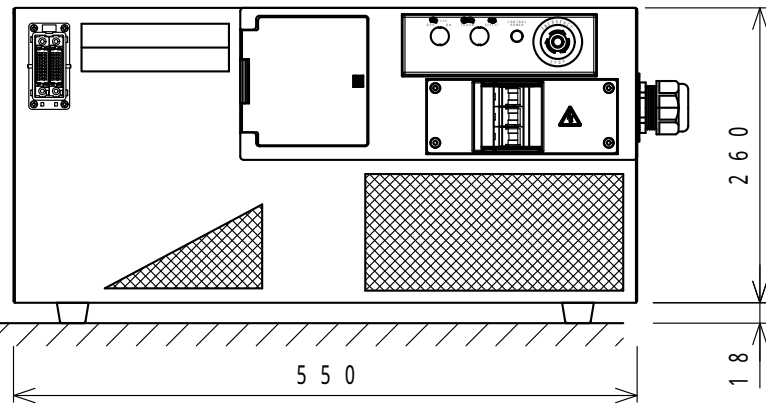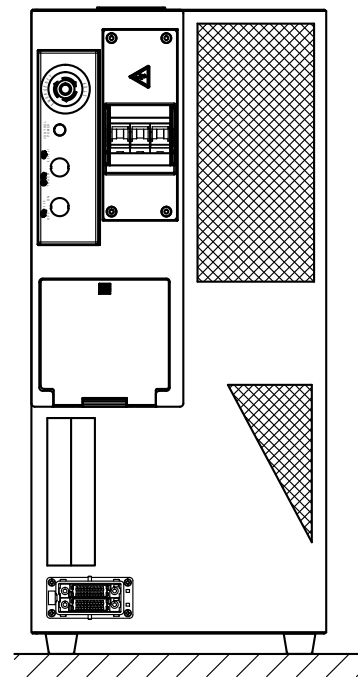

F R O N T   V I E W

